



Soteria Dimension

Addressable – Devices

Part No. FL5100-600APO

www.illuminoignis.co.uk

Product Details

The innovative design of the Soteria Dimension Optical Detector differs from standard fire detectors, having no chamber and being flush mounted. A new optical sensing technology is used to detect smoke particles outside the detector housing. A combination of Infra-Red (IR) LEDs and photo-diodes identify smoke particles, detected just below the detector housing and initiates an alarm.

Key Features

- Low profile design
- Utilises digital CoreProtocol communications
- Compatible with Discovery and XP95 systems*
- Integrated switchable isolator as standard
- 8-way DIL switch addressing
- Drift compensation
- FasTest® for quicker testing
- Tricoloured LED status indicator
- Polycarbonate moulding for colour stability and strength
- Comprehensively tested to exceed EN 54-7 and EN 54-17 standards
- Locking mechanism (grub screw)

*Note: Not all features may be available when Soteria devices are connected to an XP95 or Discovery fire control panel



Technical Specifications

All data is supplied subject to change without notice. Specifications are typical at 24V, +25°C and 50% RH unless otherwise stated.

Detection principle	Photo-electric light scattering	
Sensor configuration	Chamberless detector with two photodiodes. Micro-controller provides sensor timings, digital signal processing and alarm decision.	
Sampling frequency	Once per second	
Terminal functions Note: L1 and L2 are polarity sensitive	-L1 in	Loop in negative
	-L1 out	Loop out negative
	+L2	Loop in and out positive
	+R	Remote indicator positive connection (internal connection to positive)
	-R	Remote indicator negative connection (4.7 mA maximum)
Supply voltage (Vmin-Vmax)	17 - 35 V dc	
Digital communication protocol	XP95, Discovery Protocol compatible and CoreProtocol ready 5 - 13 V peak to peak	
Quiescent current	1 mA	
Power-up surge current	1 mA	
Maximum power-up time	15 s	



Soteria Dimension

Addressable – Devices

Part No. FL5100-600APO

www.illuminoignis.co.uk

Technical Specifications – Continued

All data is supplied subject to change without notice. Specifications are typical at 24V, +25°C and 50% RH unless otherwise stated.

Alarm current, LED illuminated	4.5 mA	
Maximum loop current through isolator	2 A	
Clean-air analogue value	23 +4/-0	
Alarm level analogue value	55	
Status indicator	Alarm	Red
	Fault	Flashing Yellow
	Isolated	Yellow
	Poll	Flashing Green
Operating temperature	-40 °C to +55 °C	
Humidity	0% to 95% RH (no condensation or icing)	
Effect of atmospheric pressure	None	
Effect of wind speed	None	
Vibration, impact and shock	EN 54-7	
IP Rating	IP55 – rating not EN 54 approved	
Standards & approvals	EN 54-7, EN 54-17, CPR, LPCB, FG and SBSC	
Dimensions:	Detector	140 mm diameter x 38.2 mm depth
	with backbox	140 mm diameter x 71 mm depth
Weight:	Detector	148 g
	with backbox	273 g
Materials:	Housing	White flame-retardant polycarbonate
	Terminals	Nickel plated stainless steel



Soteria Dimension

Addressable – Devices

Part No. FL5100-600APO

www.illuminoignis.co.uk

Electrical Considerations

The Soteria Dimension Optical Detector is designed to be connected to a two-wire loop circuit carrying both data and a 17 V – 35 V dc supply. A short-circuit isolator is also integrated into the detector head.

Operating Principles

The Soteria Dimension Optical Detector contains two daylight filtered photo-diodes and three IR emitters in different positions and angles. Different combinations of these are used to act as smoke sensors and proximity sensors to measure the smoke level at the detector and to detect any physical obstruction or interference of the detector.

As this detector is chamberless, an IR LED emits light outside the detector. The light is scattered by smoke back towards the detector and registered by a photo-diode.

A pair of microprocessors control these sensors, setting the sensor timings and using a digital phase-sensitive detection algorithm to reduce noise and the effect of background light. They then provide digital filtering for transient rejection, compensation for drift and temperature and ultimately make an alarm decision.

The mode of operation may be selected at the fire control panel (see Table 1).

Table 1: Soteria Dimension Optical Detector operating modes

Mode	Response Value		Minimum Time to Alarm	Minimum Time to Proximity Fault
	%/m*	dB/m**	Seconds	Seconds
1	4.8	0.27	15	10
2	4.8	0.27	30	10
3	4.8	0.27	15	20
4	4.8	0.27	30	20
5	4.8	0.27	30	30

* Tested in grey smoke

** Tested in oil mist to EN 54-7 standard

Anti-abrasion coated windows make the detector more resistant to physical damage.

With the detection region external to the detector case, the Soteria Dimension Optical Detector is designed to be flush mounted, with a very low profile.

The device has a polycarbonate front plate, which can be locked into place with a grub screw locking mechanism.

Three LEDs provide status indication as detailed in the Technical Data table (see page 1).

The Soteria Dimension Optical Detector has been designed and manufactured in the UK to exacting standards using advanced simulation and development processes.

Application

Fire detectors should always be installed in accordance with all local and national laws and codes of practice.

Optical smoke detectors are recommended for general use, particularly where there is a risk of slow burning fires.

Communication

The Soteria Dimension Optical Detector uses the Apollo digital CoreProtocol to allow more advanced control and configuration, whilst maintaining backwards compatibility with previous generations of Apollo products – Discovery and XP95. For future feature availability, please check with your panel partner.

It should be noted that not all features of the Soteria Dimension Optical Detector will be available when used with Discovery or XP95 fire control panels. If the Soteria Dimension Optical Detectors are used with XP95 fire control panels incorporating drift compensation algorithms, these must be disabled when communicating with the Soteria Dimension Optical Detectors.

Device Addressing

The device address may be set using an 8-bit DIL switch on the detector head.

Backward Compatibility

The Soteria Dimension Optical Detectors have been designed to operate on XP95 and Discovery loops.

EMC Directive 2014/30/EU

The Soteria Dimension Optical Detector complies with the essential requirements of the EMC Directive 2014/30/EU, provided that it is used as described in this data sheet.

A copy of the Declaration of Conformity is available from Apollo on request.

Conformity of the Soteria Dimension Optical Detector with the EMC Directive, does not confer compliance with the directive on any apparatus or systems connected to it.

Construction Products Regulation 305/2011/EU

The Soteria Dimension Optical Detector complies with the essential requirements of the Construction Products Regulation 305/2011/EU.

A copy of the Declaration of Performance is available from Apollo on request.



Soteria Dimension

Addressable – Devices

Part No. FL5100-600APO

www.illuminoignis.co.uk


Electrical Considerations

The Soteria Dimension Optical Detectors have been designed with a comprehensive set of features to support maintenance and service, from self test capabilities to drift compensation warnings on dirty detectors.


The new FasTest mode facility on the Soteria Dimension Optical Detector, which can only be enabled on compatible fire control panels, facilitates quicker testing of detectors with appropriate test equipment. The FasTest disables a portion of the signal processing algorithm and also the built-in proximity sensor to allow for a faster detector response, whilst ensuring that the detectors absolute sensitivity remains identical to that of Mode 3 (refer to Table 1). This helps to reduce commissioning time.

The detector may also be tested using a smoke pen, with the method described in the installation guide for this product - 39215-173. Maintenance has to be performed in accordance with all applicable standards. Clean the detector externally using a soft damp cloth. If the cleaning process takes more than 10 seconds, the detector may register a fault. For full cleaning and recalibration detectors should be returned to Apollo Fire Detectors.

Figure 1: Soteria Dimension Optical Detector dimensional drawing

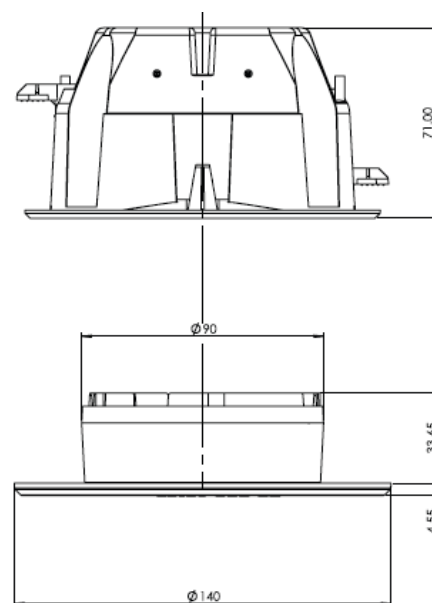

EXPLODED VIEW OF DETECTOR FITTED & BACKBOX

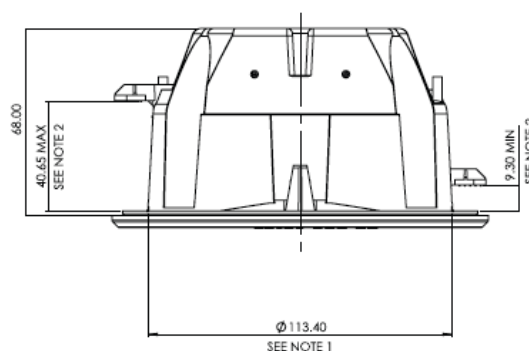

DETECTOR FITTED TO BACKBOX

Note:

- 1) Use a 114 mm (4.5") cutter
- 2) Ceiling thickness