© Illumino Ignis Ltd. 2026. All Rights Reserved

Illumino Ignis Ltd™
LIGHTING & FIRE DESIGN, SUPPLY & SUPPORT

SmartCell Dual Input/Output Device for Fire Zones Details

Radio - Devices

Part No. SC-41-0200-0001-99

www.illuminoignis.co.uk

Product Details

The SmartCell Input / Output Device is quick and easy to install and offers individual addressing at the SmartCell Control Panel.

Features include two resistor monitored inputs, two voltage free outputs and bidirectional 868 MHz communication.

This device is third party certified and compatible with the full SmartCell product range.

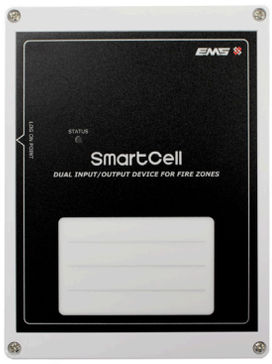

Key Features

- Full wireless communication with panel
- Quick and easy to install
- Two resistor monitored inputs
- Two voltage free outputs
- For connection to remote fire devices

Technical Specifications

General	Wireless frequency	868 MHz
Input	Input quantity	2
	Input type and rating	Resistor monitored inputs
Output	Output quantity	2
	Output type and rating	Voltage free outputs, rated 1 A at 30 VDC
Physical	Physical dimensions	150 x 200 x 55 mm (W x H x D)
	Net weight	0.45 kg
	Mounting type	Wall mount
	Batteries	3 x ER14505M 3.6 V lithium thionyl chloride batteries (Fanso or Titus)
Environmental	Operating temperature	-10 to +55°C
	Storage temperature	-10 to +30°C (with batteries) -10 to +55°C (without batteries)
	Relative humidity	95% noncondensing max.
	Environment	Indoor
Standards & regulation	Compliancy	CE
	Certification	CPR
	Standards	EN54-13 EN54-18 EN54-25

0203 00 44 855
sales@illuminoignis.co.uk
illuminoignis.co.uk

Illumino Ignis Ltd, Ignis House,
Imperial Way, Eagle Business Park,
Yaxley, Cambridgeshire, PE7 3GP