



XPERT 8 Intelligent Mounting Base

Addressable – Devices

Part No. SA5000-204APO

www.illuminoignis.co.uk

Product Details

All detectors in the Soteria®, Discovery® and XP95® range fit into the XPERT 8 Intelligent Mounting Base. The base has a wide interior diameter for ease of access to cables and terminals. The 'E-Z Fit' feature allows you to fit the base screws, place the XPERT 8 Intelligent Mounting Base over the screws, slide it into place and tighten the screws. The detector requires a clockwise rotation into the base for fitting. Additionally the detector can be locked into the base for increased security, by a grub screw using a 1.5mm hexagonal driver. The XPERT 8 card, Part Number 38532-064, supplied with the base, has prepunched pips to remove to set the address. Refer to the XPERT 8 Intelligent Mounting Base Installation Guide 39215-005 for details on how to set the address.



Key Features

- Compatible with Soteria, Discovery and XP95 detectors
- Isolated and Non-isolated devices supported
- Isolated wiper – maintains loop connectivity during temporary removal of devices
- Supplied with XPERT 8 Card for CoreProtocol® *
- 'E-Z Fit' allows for simple mounting of the detector base after wiring
- Base mark allows for LED detector alignment

* Note: XPERT 8 card increases the address capacity to 254 when using Soteria detectors and CoreProtocol enabled fire control panels.

Technical Specifications

All data is supplied subject to change without notice. Specifications are typical at 24 V, 25°C and 50% RH unless otherwise stated.

Terminal functions (Note: With reference to Figures 1,2 & 3, L1 & L2 are polarity sensitive when used with a Soteria detector)	+L2	Loop in & out positive
	-L1 in	Loop (isolated) negative
	-L1 out	Loop (isolated) negative
		Functional earth
	+R	Remote indicator positive connection
	-R	Remote indicator negative connection
Dimensions	100mm dia. x 20mm height	
Weight	63g	
Materials	Base: Flame-retardant polycarbonate Terminals: Nickel plated stainless steel	




XPERT 8 Intelligent Mounting Base

Addressable – Devices

Part No. SA5000-204APO

www.illuminoignis.co.uk

Figure 1: Wiring diagram for detectors with isolator*

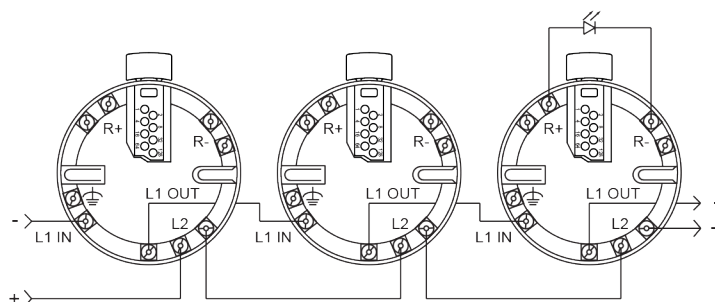

Note: Detectors without isolators will work with the above connections, however, if there are no isolators in the system, or it is a retrofit application, the arrangement below is recommended.

Figure 2: Wiring diagram for detectors without isolator

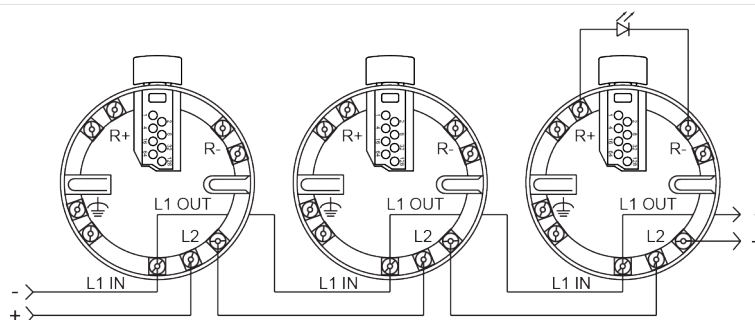


Figure 3: Wiring diagram for detectors without isolator with common remote LED

