



Manual Call Point

Addressable – Devices

Part No. EV-MCP2-IP24

www.illuminoignis.co.uk

Product Details

EV-MCP2-IP24 is a Type A Indoor Manual Call Point, compatible with Evolution analogue addressable system devices.

The Manual Call Point comprises a Non Frangible, Resettable, operating face with an LED provided to Indicate Alarm active condition.

The device is provided with a Surface mount Backbox and an adaptor plate to allow flush mounting.

The address may be set using DIL switch on the Device.



Key Features

- STI "Reset" IP24 Housing
- IP24 Rated
- DIL Switched Addressed
- Includes Backbox and RF Wall Plate
- Replaces EV-MCP Reset

Notes

Surface or Flush mount Back Box
Shall be 35mm Deep

Technical Specifications

Manual Call Point Type	Type A Indoor
Operating Method	Non Frangible, Resettable
Operating Element	Microswitch
Operating loop voltage	20 to 35 Vdc
Quiescent current	200 μ A
Alarm current	2 mA (LED On)
Operating temperature	-10°C to +55°C
Storage temperature	-25°C to +70°C
Relative humidity	< RH 95% (Non-condensing)
Cable terminals	0.75 to 2.5 mm ²
Material	PC
Weight	115g
Dimensions Flush	87mm x 87mm x 23mm
Dimensions Surface	87mm x 87mm x 58mm
I.P. Protection Rating	IP24

The specifications described herein are subject to change without notice



Manual Call Point

Addressable – Devices


Part No. EV-MCP2-IP24

www.illuminoignis.co.uk


All wiring must conform to the current edition of IEE Wiring regulations and BS5839 Part 1

All loop Cable Screens shall be connected together, but must be Isolated from Ground. Cable Screens shall be connected to Earth Ground within the Control Panel ONLY.

Connections

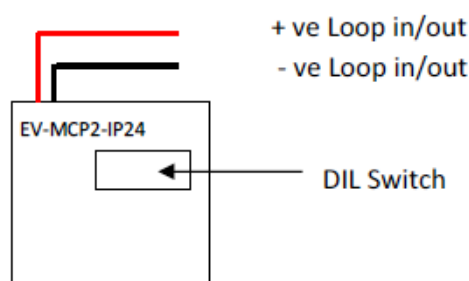

Dimensions

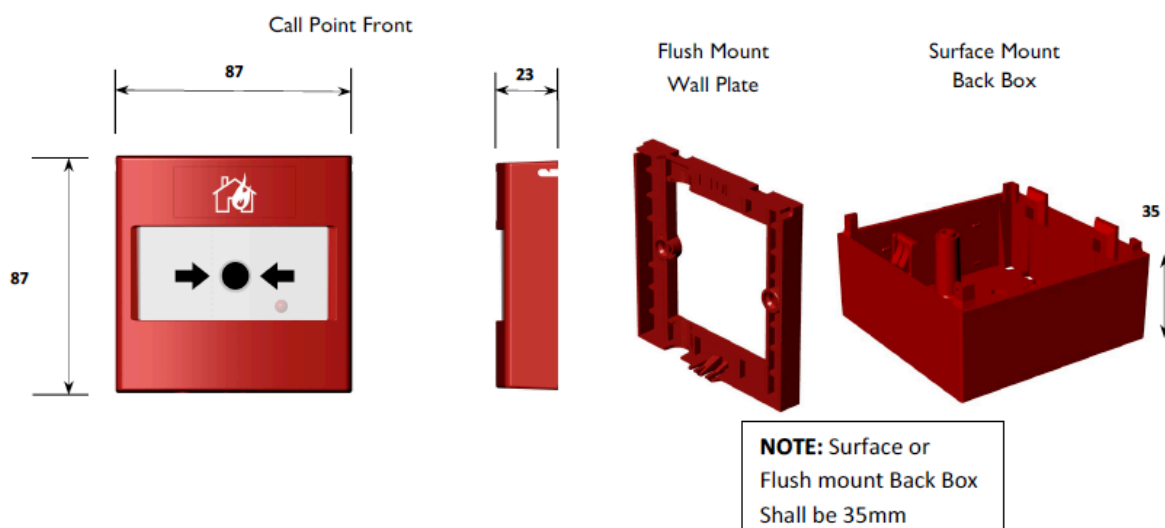

The specifications described herein are subject to change without notice