© Illumino Ignis Ltd. 2026. All Rights Reserved

Illumino Ignis Ltd™
LIGHTING & FIRE DESIGN, SUPPLY & SUPPORT

FC410MIO Multi I/O Module

Addressable - Devices

Part No. 555.800.765

www.illuminoignis.co.uk

Product Details

The FC410MIO Multi I/O Module has three inputs and two outputs from latching relays. The inputs can monitor fire contacts such as extinguishing system control, ventilation control, fire door control etc. The two relays outputs provide volt-free relay changeover contacts.

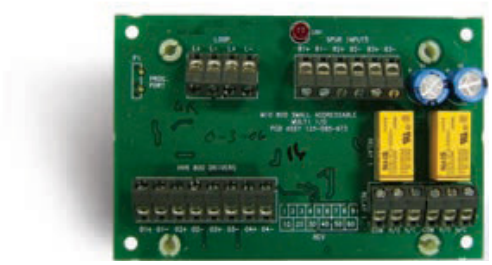

Key Features

- 3 inputs for monitoring fire contacts
- 2 outputs with latching relays
- Supports extinguishing system control
- Enables ventilation and fire door control
- Volt-free relay changeover contacts

Technical Specifications

DESCRIPTION	Multi Input/ Ouput Unit
DIMENSIONS (mm)	PCB 72x110x18
WEIGHT (g)	70
OPERATING TEMPERATURE	- 20 - + 70 °C
RELAY CONTACTS	27k Ohms ½
EOL RESISTOR VALUE	330 Ohm
NUMBER OF INPUTS	3
NUMBER OF OUTPUTS	4

Output 1 and 2 HVR Driver and Relay / Output 3 and 4 HVR Driver only

0203 00 44 855
sales@illuminoignis.co.uk
illuminoignis.co.uk

Illumino Ignis Ltd, Ignis House,
Imperial Way, Eagle Business Park,
Yaxley, Cambridgeshire, PE7 3GP